

Small Form Factor Pluggables 1000BASE-T, -SX or -LX

- ▶ Hot-Pluggable SFP Footprint LC Optical Transceiver
- ▶ Class 1 Laser International Safety Standard IEC-60825 Compliant
- ▶ Compatible with Small Form Factor Pluggable Multi-Sourcing Agreement (MSA)

TN-GLC-xxx



The Transition Networks TN-GLC-xxx series small form factor pluggable (SFP) transceiver modules are designed to install in any SFP port allowing for 1000Base-T, 1000Base-SX or 1000Base-LX interfaces to the network through the SFP connector. The TN-GLC-xxx transceivers are Cisco compatible* and are designed for bi-directional serial-optical data communication such as Gigabit Ethernet or fiber channel at speeds up to 1.25 Gbps.

*Transition Networks' SFP modules fully comply with the Multi-Sourcing Agreement (MSA). This compliance allows our SFP modules to be used in all other MSA compliant SFP platforms. In addition, TN SFP modules are also compatible with all Cisco SFP-based routers and switches, as well as Cisco's IOS software. TN SFP modules **ARE NOT** Cisco OEM brand modules.

Applications

- ▶ Gigabit Ethernet Switches and Routers
- ▶ Fibre Channel Switch Infrastructure
- ▶ XDSL Applications
- ▶ Metro Edge Switching


Additional Features

TN-GLC-xxx modules:

- ▶ Compliant with IEEE 802.3z Gigabit Ethernet
- ▶ Compliant with Fiber Channel 1X SM-LC-L FC-PI

Can be used on Optical Line Converter xFMFF4040-100

Fiber Connections with SFPs

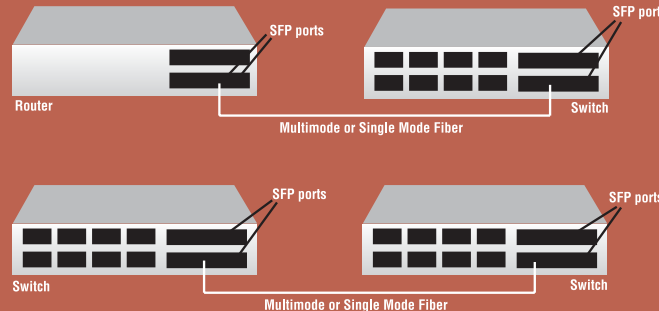

Specifications

Standards IEEE 802.3 2003; ANSI X3.297-1997

Fiber Optic Connector Specs

SKU	Min TX PWR (dBm)	Max TX PWR (dBm)	RX Sens (dBm)	Max In PWR (dBm)	Link Budget (dB)
TN-GLC-SX-MM	-9.5	-3.5	-18.0	-1.0	8.5
TN-GLC-SX-MM-2K	-9.0	-1.0	-19.0	-1.0	10.0
TN-GLC-LH-SM	-9.5	-3.0	-20.0	-3.0	10.5
TN-GLC-ZX-SM	0.0	+5.0	-24.0	-3.0	24.0
TN-GLC-BX-U	-9.0	-1.0	-21.0	-1.0	12.0
TN-GLC-BX-D	-9.0	-1.0	-21.0	-1.0	12.0

Dimensions (fiber) **Width:** 0.52" [13 mm]
Depth: 2.18" [55 mm]
Height: 0.33" [8 mm]

Dimensions (copper) **Width:** 0.95" [24 mm]
Depth: 2.8" [71 mm]
Height: 0.54" [14 mm]

Power 3.3V

Power Consumption 0.66 watts (fiber)
1.0 watts (copper)

Environment 0°C – 70°C operating
-40°C – 85°C storage

Compliance IEC-60825; FDA 21; CFR 1040.10 and 1040.11

Warranty Lifetime

Ordering Info

TN-GLC-T
1000BASE-T (RJ-45)
100M/328ft.

TN-GLC-SX-MM
1000BASE-SX 850nm MM (LC)
[62.5/125µm: 220 m/722 ft.]
Link Budget: 8.5 dB
[50/125µm: 550 m/1804 ft.]
Link Budget: 8.5 dB

TN-GLC-SX-MM-2K
1000BASE-SX 1300nm (LC) Ext. MM
[2 km/1.2 mi.] Link Budget: 10.0 dB

TN-GLC-LH-SM
1000BASE-LX 1310nm (LC) SM
[10 km/6.2 mi.] Link Budget: 10.5 dB

TN-GLC-ZX-SM
1000BASE-LX 1550nm (LC) SM
[80 km/49.7 mi.] Link Budget: 24.0 dB

TN-GLC-BX-U
1000BASE-BX 1310nm TX/1490nm RX
single fiber (LC) SM
[10 km/6.2 mi.] Link Budget: 12.0 dB

TN-GLC-BX-D
1000BASE-BX 1490nm TX/1310nm RX
single fiber (LC) SM
[10 km/6.2 mi.] Link Budget: 12.0 dB



Transition Networks, Inc.
10900 Red Circle Drive
Minnetonka, MN 55343 USA
tel 952.941.7600
or 800.526.9267
fax 952.941.2322
info@transition.com
http://www.transition.com

©2008 Transition Networks, Inc.
All trademarks are the property of their respective owners.
Technical information is subject to change without notice.